




### Hidden Flange Gable Louver - used for new stucco or siding walls

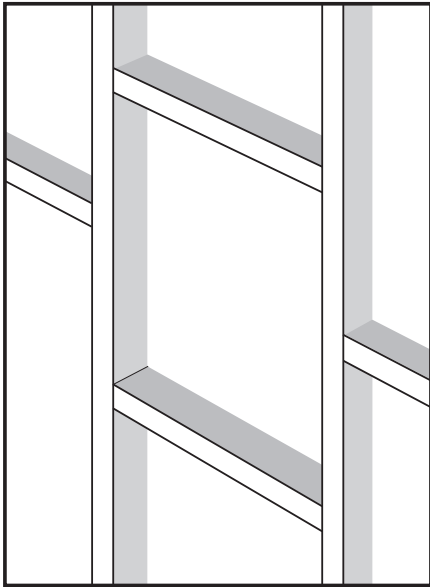

1) Frame opening 1/4" larger than vent body size.

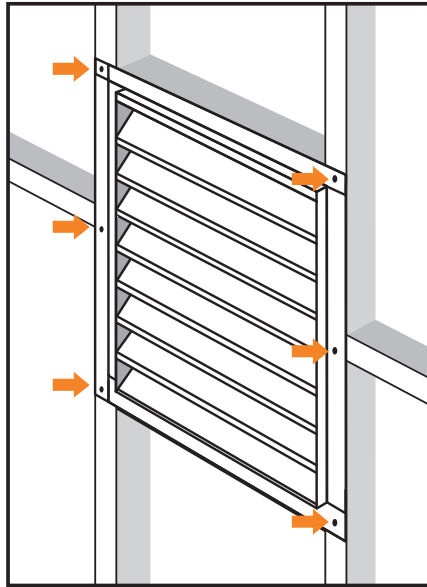


2) Insert vent into opening and fasten to frame with galvanized nails

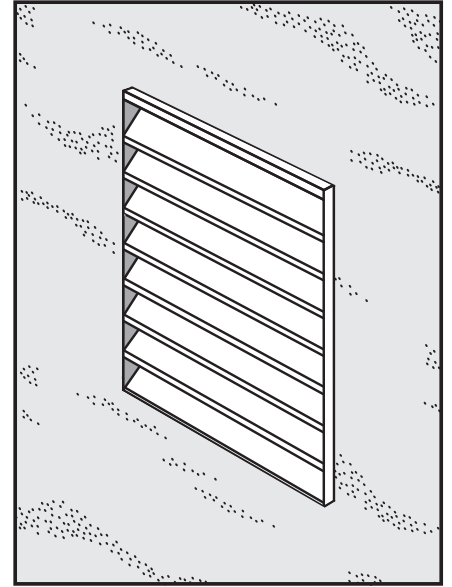

3) Finish with lath and plaster or siding material.

| Size A x B      | N.F.V.      | Rough Opening         | Pack QTY. |
|-----------------|-------------|-----------------------|-----------|
| 12 in. x 12 in. | 63 Sq. In.  | 12.25 in. x 12.25 in. | 10        |
| 12 in. x 14 in. | 65 Sq. In.  | 12.25 in. x 14.25 in. | 10        |
| 12 in. x 18 in. | 93 Sq. In.  | 12.25 in. x 18.25 in. | 10        |
| 12 in. x 24 in. | 118 Sq. In. | 12.25 in. x 24.25 in. | 10        |
| 14 in. x 12 in. | 65 Sq. In.  | 14.25 in. x 12.25 in. | 10        |
| 14 in. x 18 in. | 110 Sq. In. | 14.25 in. x 18.25 in. | 10        |
| 14 in. x 24 in. | 147 Sq. In. | 14.25 in. x 24.25 in. | 10        |
| 14 in. x 30 in. | 185 Sq. In. | 14.25 in. x 30.25 in. | 2         |
| 18 in. x 18 in. | 133 Sq. In. | 18.25 in. x 18.25 in. | 2         |
| 18 in. x 24 in. | 190 Sq. In. | 18.25 in. x 24.25 in. | 5         |
| 18 in. x 30 in. | 221 Sq. In. | 18.25 in. x 30.25 in. | 2         |
| 20 in. x 24 in. | 197 Sq. In. | 20.25 in. x 24.25 in. | 2         |
| 24 in. x 18 in. | 190 Sq. In. | 24.25 in. x 18.25 in. | 5         |
| 24 in. x 24 in. | 253 Sq. In. | 24.25 in. x 24.25 in. | 5         |
| 24 in. x 30 in. | 317 Sq. In. | 24.25 in. x 30.25 in. | 5         |
| 36 in. x 18 in. | 266 Sq. In. | 36.25 in. x 18.25 in. | 2         |

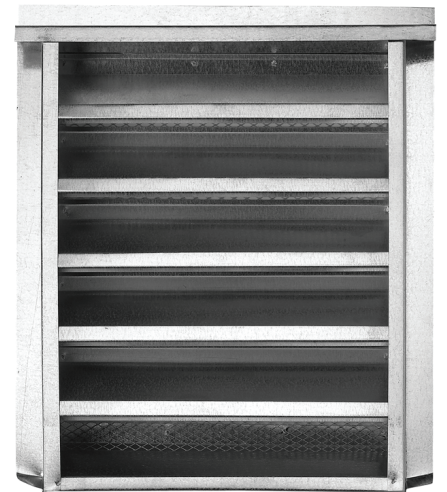

Flange Center = 1/8th inch mesh

Flange Front,  
Plaster Ground = 1/4 inch mesh



**CAUTION!** Working above grade is inherently dangerous, be sure that proper fall protection measures are in place. When working with power tools, gloves and eye protection are absolutely required.